



BEHEFITS OF HIGH PRESSURE:





- IMPROVED CHIP MANAGEMENT
- INCREASED SPEED & FEEDS
- INCREASED TOOL LIFE
- SUPERIOR FILTRATION TO INCREASE COOLANT LIFE
- IMPROVED PART FINISHES

AVAILABLE

ULTRAFLEX MODELS

ULTRAFLEX SERIES									
Unit	Pump Style	Volume	Pressure	Flow	Unit Configuration	Unit	Outlets		Filtration
Series	. amp style	Volume	ressare	Туре	omit comigaration	KVA	Standard	Optional	Туре
	Hydra-Cell	9gpm 36lpm	300-1000psi 20-70bar	Fixed or Variable	Base Model	10.85	2	Up to 8	10um Bag
70-36					Mist Collector	11.64			or
, 5 50					Chiller	21.20			5um
					Chiller & Mist Collector	22.00			Cyclonic
	CAT Pump	16gpm 60lpm	300-1000psi 20-70bar	Fixed or Variable	Base Model	14.38	- 2	Up to 8	10um Bag
70-60					Mist Collector	15.18			or
,0-00					Chiller	24.66			5um
					Chiller & Mist Collector	25.46			Cyclonic
	CAT Pump		300- 750psi 20-55bar	Variable	Base Model	14.38	2	Up to 8	10um Bag
55-75		20gpm			Mist Collector	15.18			or
33-13		75lpm		variable	Chiller	24.66			5um
					Chiller & Mist Collector	14.50			Cyclonic
UD SERIES - DUAL HIGH PRESSURE PUMP MODEL									
	Hydra-Cell		300-1000psi 20-70bar	Fixed or Variable	Base Model	17.74	4		10um Bag
70-36-2		19gpm 72lpm			Mist Collector	18.53		Up to 8	or
70-30-2					Chiller	28.10			5um
					Chiller & Mist Collector	28.89			Cyclonic
SWISS	MODELS								
140-15	CAT Pump	5gpm 15lpm	300-2000psi 20-140bar	F:l	Base Model	11.25	2	Up to 8	10um Bag
				Fixed	Mist Collector	12.04			or
				or Variable	Chiller	21.60			5um
					Chiller & Mist Collector	22.40			Cyclonic
	CAT Pump		300-3000psi 20-210bar	Fixed or Variable	Base Model	14.26	2	Up to 8	10um Bag
210-15		4gpm 15lpm			Mist Collector	15.06			or
					Chiller	25.08			5um
					Chiller & Mist Collector	25.88			Cyclonic

MODULAR DESIGN



STANDARD FEATURES:













- Unit Volumes: 4-20 Gpm / 15-75 Lpm
- Unit Pressures: 300-3000 Psi / 20–210 Bar
- 65 Gal / 250L Clean Tank
- Full Color HMI Display
- UL/CSA/CE Cabinet Standards
- 10um Quad Bag Filtration
- Two High Pressure Outlets 4 & 8 Outlets Available
- Quick Disconnect Low Pressure Hose Kits
- Unit Footprint: W-24" X L-56 X H-63" W-609 X L-1422 X H-1600
- Unit Castor Package
- On Board Feeder Pump
- Wiring Harnesses With Machine Side Connectors
- Unit Power To Specification 230v / 460v
- Arc Flash Compliant

1422

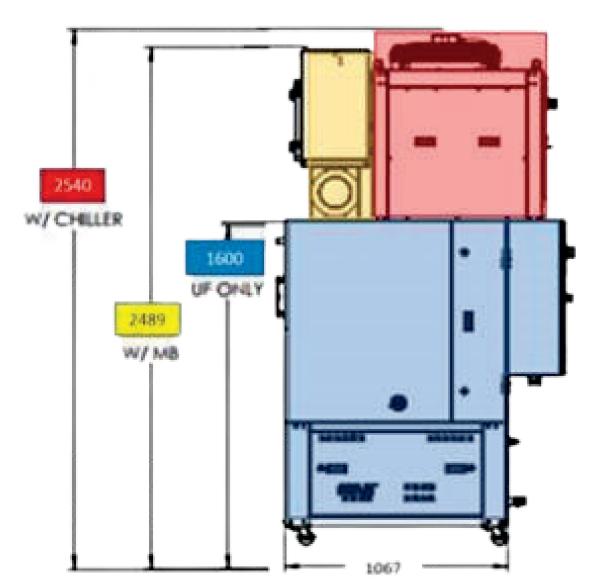

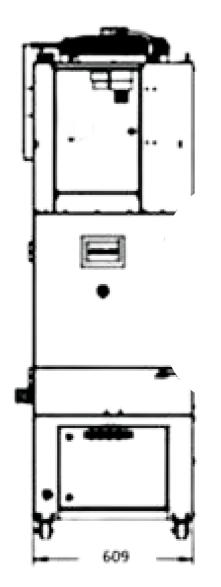

INTEGRATED UNIT OPTIONS

- Unit Mounted And Integrated 36,000 Btu Chiller
- Unit Mounted And Integrated 850 Cfm Mist/Smoke Collector
 - Available HEPA Filter
- Unit Mounted And Integrated Oil Skimmer
- Cyclonic Media Fee Filtration
 - Water Soluble Coolant Only
- Up To 4 M-code Programmable Preset Pressures
- Infinite HMI Manual Programmable Pressure Settings
- Ethernet IP Interface
- Supplemental Tank 100 Gal / 380L
- Supplemental Wash Pumps To Spec

